

LIEBERT® NXL™ 500-750kVA, SINGLE-MODULE SYSTEM SITE PLANNING DATA


Table 1 Site planning data—500-750kVA

UPS Rating		AC Input/ Output Voltage VAC	Input Isolation Transformer	Rectifier AC Input Current		Bypass/Output AC Output Current Nom	Maximum Battery Current at End of Discharge, A	Maximum Heat Dissipation, Full Load, BTU/h (kW)	Dimensions WxDxH, in. (mm)	Approximate Weight Unpacked lb. (kg)
kVA	kW			Nom	Max					
500	450	480	YES	643	804	601	1250	124,805 (36.6)	111.6x39.4x76.8 (2835x1000x1950)	10,310 (4677)
625	562.5	480		799	995	752	1530	167,265 (49.0)	140.5x39.4x76.8 (3568x1000x1950)	13,650 (6192)
750	675	480		975	1219	902	1845	213,587 (62.6)		
750	675	575		815	1018	753	1851	215,790 (63.2)		
750	675	600		759	949	722	1851	200,173 (58.7)		
See Notes below:			—	1,3,6,7,8,10,11		2,3,4,6,7,8,10,11	5,6,8,10,11	—	9	9

Notes for Table 1

- Nominal rectifier AC input current (considered continuous) is based on full rated output load. Maximum current includes nominal input current and maximum battery recharge current (considered non-continuous). Maximum input current is controlled by current limit setting, which is adjustable 25 to 125% of nominal input current.
- Bypass AC input and AC output current (considered continuous) is based on full rated output load. Maximum current includes nominal output current and overload current for 10 minutes.
- Feeder protection (by others) for rectifier AC input and bypass AC input is recommended to be provided by separate overcurrent protection devices.
- UPS output load cables must be run in separate conduit from input cables.
- Power cable from module DC bus to battery should be sized for a total maximum 2.0 volt line drop (power cable drop plus return cable drop as measured at the module) at maximum discharge current
- Grounding conductors to be sized per NEC 250-95. Neutral conductors to be sized for full capacity-per NEC 310-16, Note 10-for systems with 4-wire loads and 20% minimum capacity for 3-wire loads.
- Rectifier AC Input: 3-phase, 3-wire, plus ground
Bypass AC Input: 3-phase, 4-wire, plus ground (3-wire plus ground in certain circumstances)
AC Output to Load: 3-phase, 3- or 4-wire, plus ground
Module DC Input from Battery: 2-wire (positive and negative), plus ground
- All wiring is to be in accordance with National and Local Electrical Codes.
- Minimum overhead clearance is 2 ft. (0.6m) above the UPS.
- Top or bottom cable entry through removable access plates. Cut plate to suit conduit size.
- Control wiring and power cables must be run in separate conduits. Control wiring must be stranded tinned conductors.



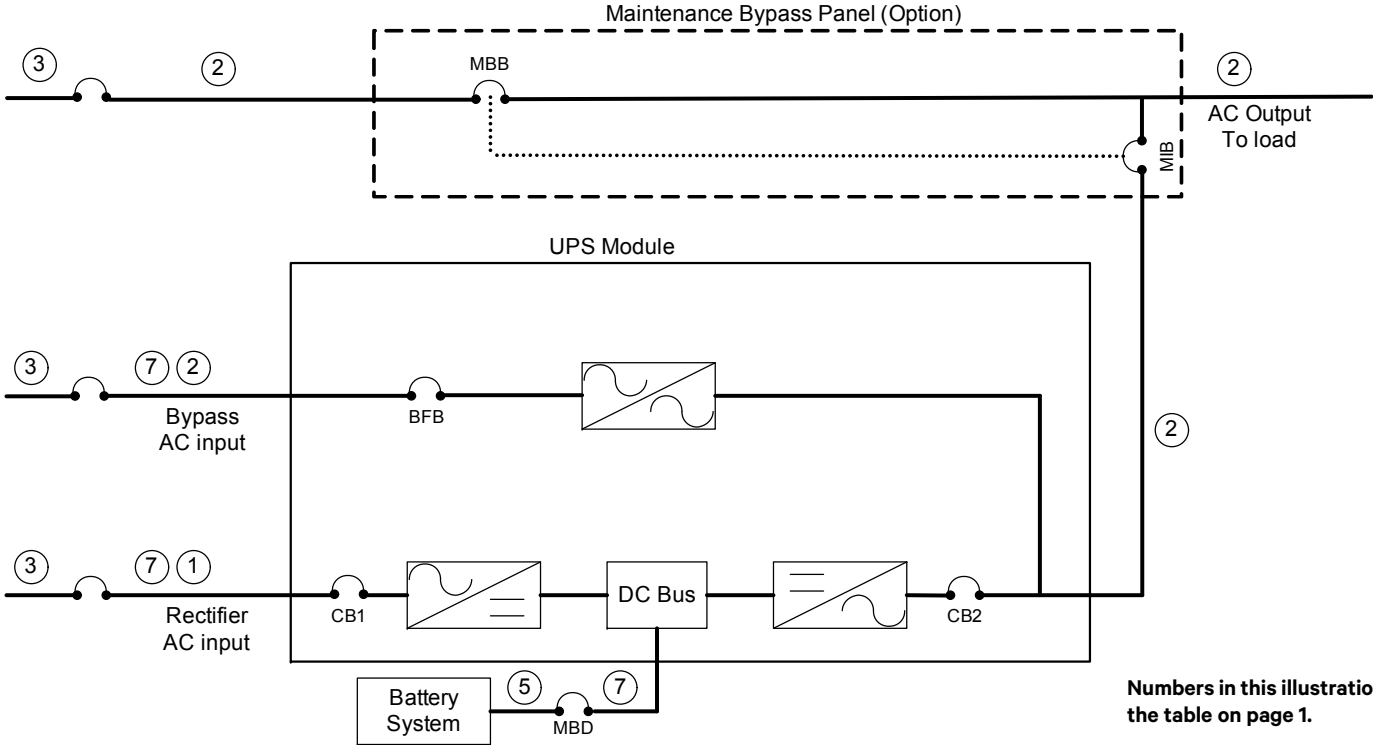

Numbers in this illustration refer to notes below the table on page 1.

The Liebert NXL is compatible with high resistance ground systems. See your local Vertiv representative for details.



© 2009 Liebert Corporation
 All rights reserved throughout the world. Specifications subject to change without notice.
 * Liebert is a registered trademark of Liebert Corporation.
 All names referred to are trademarks or registered trademarks of their respective owners.
 SL-25517_REV7_02-17

Technical Support / Service
 800-543-2378
 powertech@vertivco.com
Web site: www.liebert.com

United States
 1050 Dearborn Drive
 P.O. Box 29186
 Columbus, OH 43229