Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.

## REAR VIEW

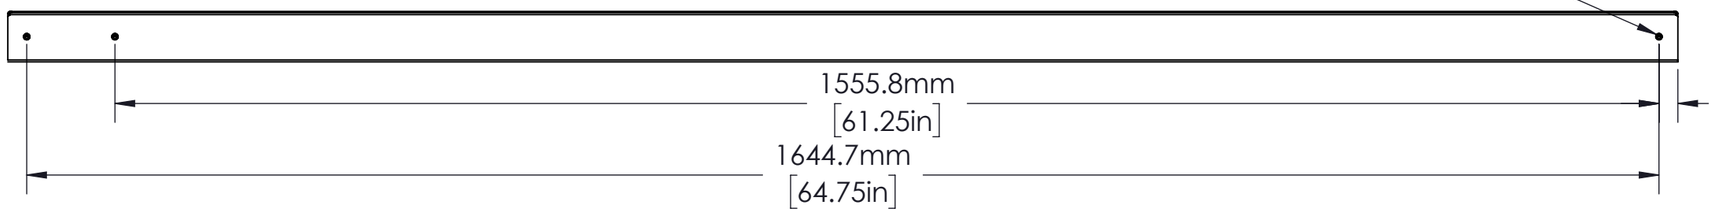


## SIDE VIEW

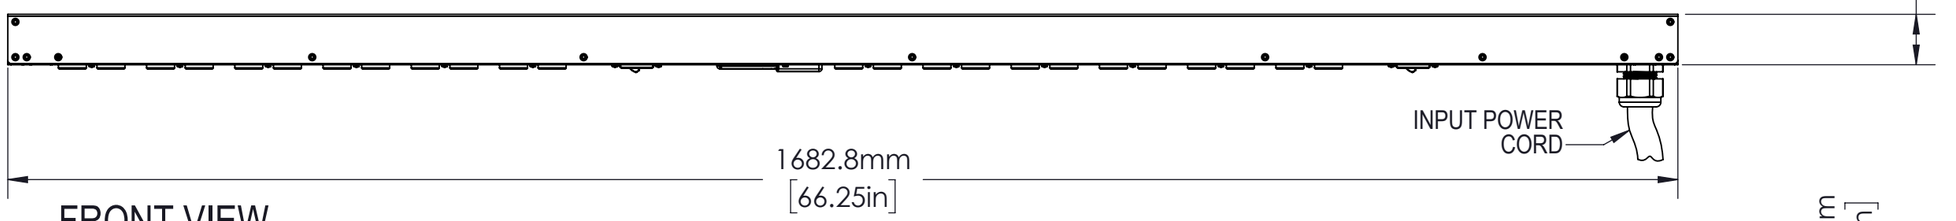


## FRONT VIEW

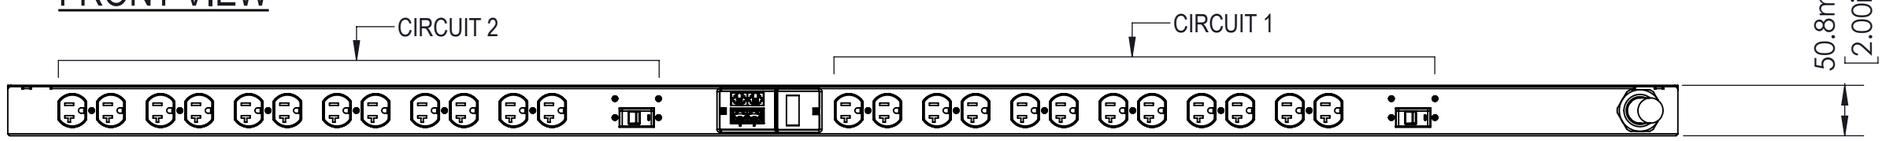

NEMA L5-30P
(30A, 1/N/PE, 100-120V)

AGENCY COMPLIANCE:
UL & c-UL Listed 60950
RoHS Compliant
FCC Part 15 Class A Conformance

ENVIRONMENTAL RATING:
Maximum Operating Temperature: 60C / 140F

NOTES
UNIT DIMENSIONS: 66.25in x 2.0in x 2.0in / 1683mm x 51mm x 51mm
SHIPPED WEIGHT: 16lbs (7.26kg)
SHIPPING DIMENSIONS: 72in x 9in x 7in / 1829mm x 223mm x 159mm
Toolless Mounting Hardware 61.25in / 1556mm and 64.75in / 1645mm, and 7938 Vertical Mounting Bracket Kit

OUTPUT POWER

| CIRCUIT | PHASE | RECEPTACLE TYPE | VOLTAGE (V) | MAX. CONTINUOUS AMPS (A) | |
|---|---|---|---|---|---|
| | | | | PER RECEPTACLE | PER CIRCUIT |
| 1 | L1 | 12XNEMA 5-20R | 100-120 | 16 | 16 |
| 2 | L1 | 12XNEMA 5-20R | 100-120 | 16 | 16 |

INPUT POWER

| INPUT CORD | INPUT PLUG | WIRE COUNT | FREQUENCY (Hz) | VOLTAGE (V) | RATED AMPS (A) | MAX. CONT. AMPS (A) |
|---|---|---|---|---|---|---|
| 10 FT | NEMA L5-30P | 1/N/PE | 50/60 Hz | 100-120V | 30 | 24 |

| METERING PARAMETER | MEASUREMENT ACCURACY |
|---|---|
| VOLTAGE | ±1% |
| CURRENT | ±1% - Input Current<br>±2% - Circuit/Breaker Current |

| Rev. | Change | Date | Name |
|---|---|---|---|
| - | - | - | - |

Dimensions in mm

Allgemeintoleranzen
General tolerances
-

Oberfläche
Finish
-

Werkstoff / Material
-

Gewicht:
Weight: -

| | Date | Name |
|---|---|---|
| Drawn | 21/06/18 | SW |
| Checked | - | - |
| Approved | - | - |

Bezeichnung / Description
Monitored, Vertical, 30A, 120V, (24)5-20R

VERTIV™

Zeichnungs-Nr. / Drawing no.
**VP8832**

Maßstab
Scale
**1:6**

Verwendet in / Used in
-

Blatt/Sheet
1/1